



The 1st

www.avantgates.com



Vertical Gates



Vertikaltor




Portail à Elévation Verticale



Cancelli ad Alzata Verticale



Pharmaceutical Factory
in Siena (Italy)

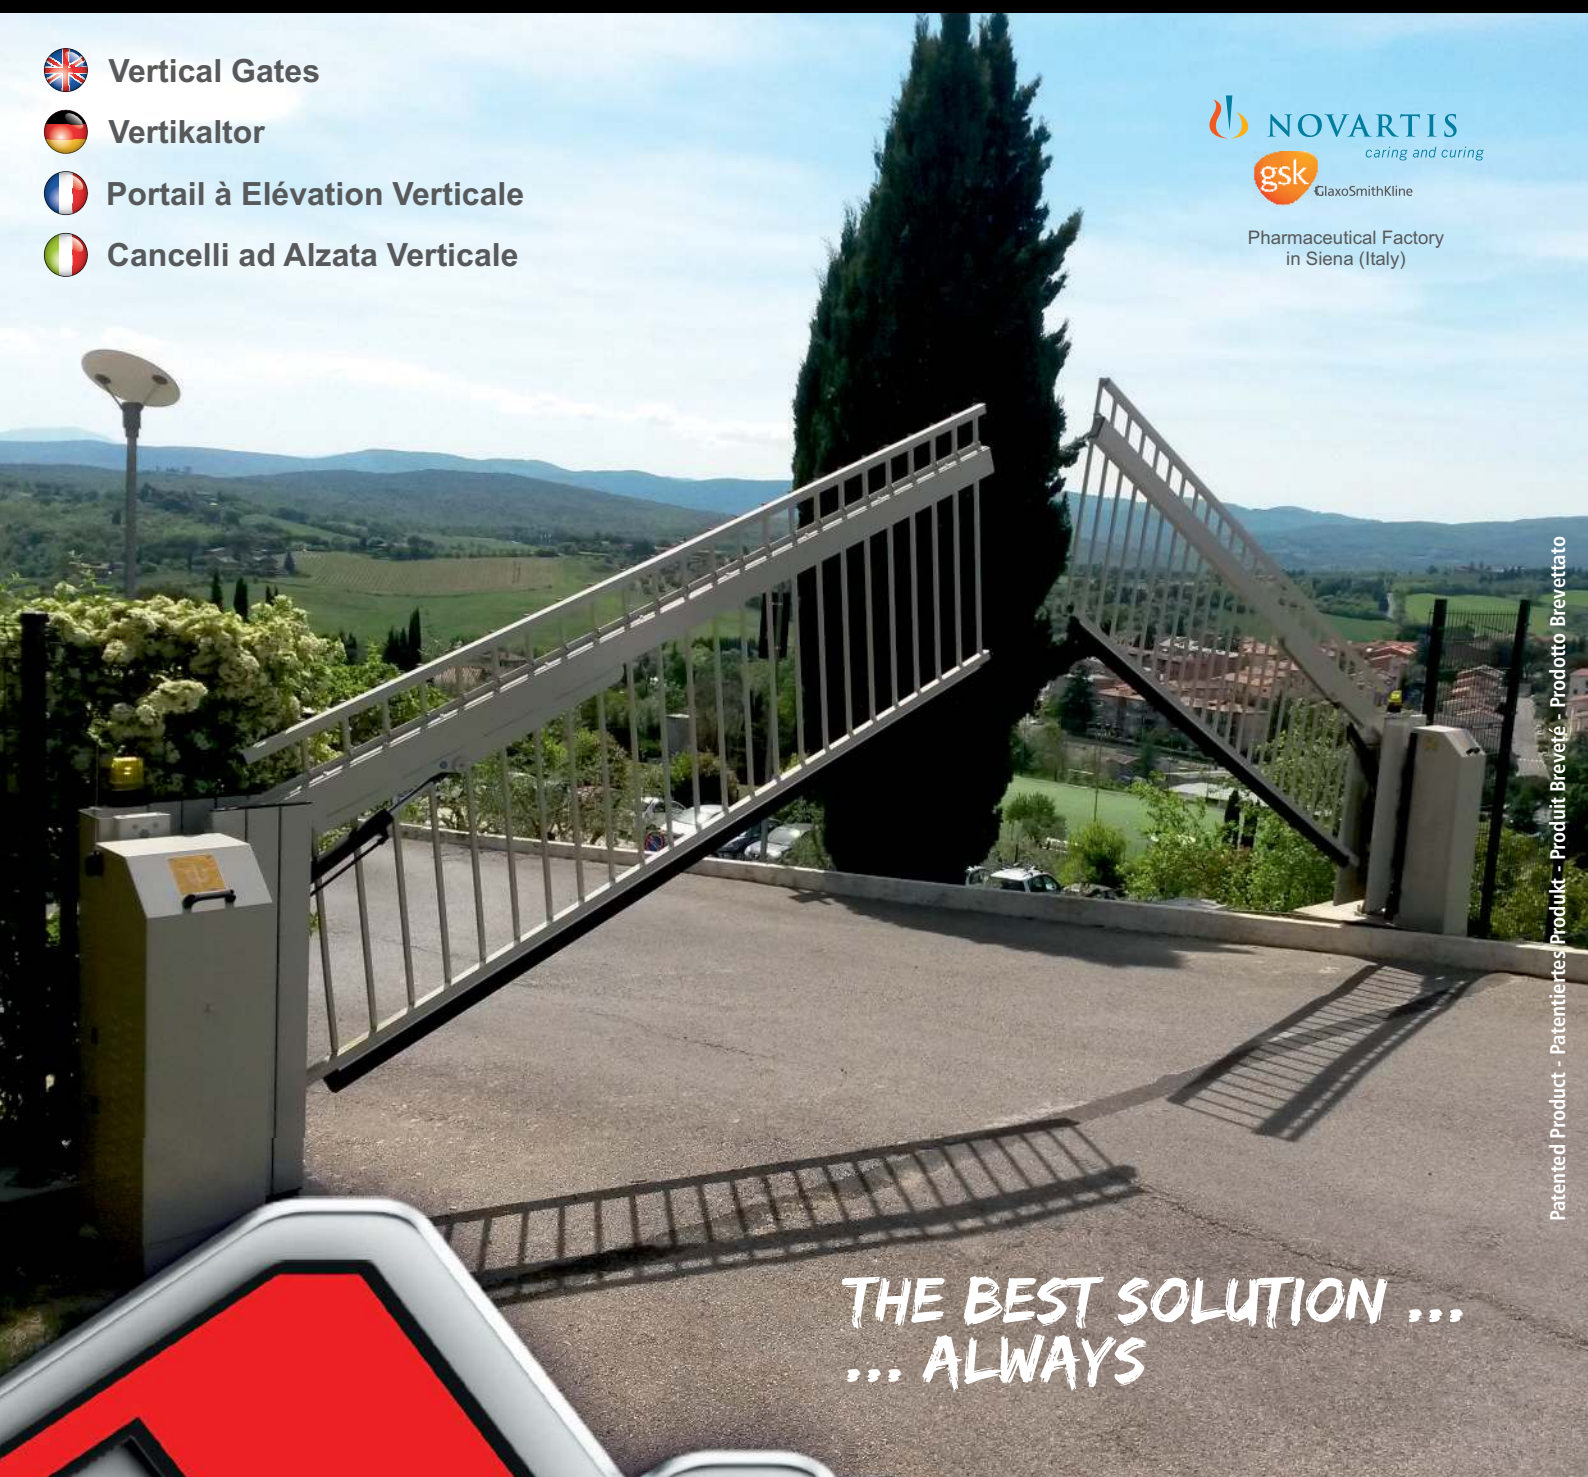

THE BEST SOLUTION ...
... ALWAYS

Patented Product - Patentiertes Produkt - Produit Breveté - Prodotto Brevettato



EN 13241-1 Certified

Industrial, commercial and garage doors
and gates. Product standard.

Test reports:

0407 - 214262/616-CPD
0407 - 214263/617-CPD
0407 - 241045/3074-CPD
0407 - 282033/6079-CPD
0407 - 316047/8418-CPR



Resistance to wind load:
Class 4 (EN 12424)


Max. wind speed: **151 km/h - 93,8 mph**



Validated

2.x I

Model - Modell Modèle - Modello	Length - Länge Longueur - Lunghezza	Height - Höhe Hauteur - Altezza	Type of rods - Stabverarbeitung Type de profil - Tipo di aste	Opening time - Öffnungszeit Temps d'ouverture - Tempo di apertura
2.x I V-STD	5,00 - 10,00 m	1,40 - 2,00 m	Aluminium 40x20 mm	~ 35 sec.
2.x I V-STD Double	10,00 - 20,00 m	1,40 - 2,00 m	Aluminium 40x20 mm	~ 35 sec.
2.x I V-ML	3,00 - 7,50 m	Up to 2,00 m	Aluminium 40x20 mm	~ 35 sec.
2.x I XL	5,00 - 8,50 m	2,00 - 2,50 m	Aluminium 40x20 mm	~ 35 sec.
2.x I AFL-C	5,00 - 8,50 m	1,40 - 2,00 m	Standard rods	~ 35 sec.


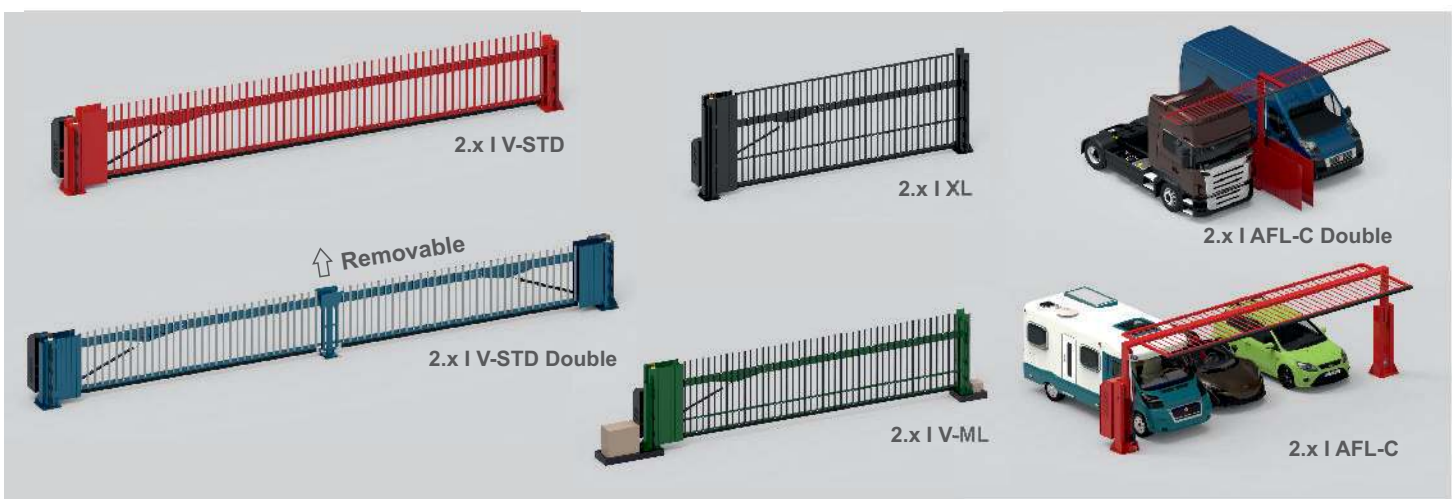


Versatility and Strength



3.x I

Model - Modell Modèle - Modello	Length - Länge Longueur - Lunghezza	Height - Höhe Hauteur - Altezza	Type of rods - Stabverarbeitung Type de profil - Tipo di aste	Opening time - Öffnungszeit Temps d'ouverture - Tempo di apertura
3.x I V-STD	5,00 - 10,00 m	1,50 - 2,00 m	Aluminium 100x25 mm	~ 35 sec.
3.x I V-DA	5,00 - 8,50 m	1,50 - 2,00 m	Aluminium 100x25 mm (double)	~ 35 sec.
3.x I V-STD Double	10,00 - 20,00 m	1,50 - 2,00 m	Aluminium 100x25 mm	~ 35 sec.
3.x I V-DA Double	10,00 - 17,00 m	1,50 - 2,00 m	Aluminium 100x25 mm (double)	~ 35 sec.
3.x I O-STD	5,00 - 8,00 m	1,50 - 1,80 m	Aluminium 100x25 mm	~ 35 sec.
3.x I O-PC	5,00 - 8,00 m	1,50 - 1,80 m	Aluminium 100x25 mm	~ 35 sec.

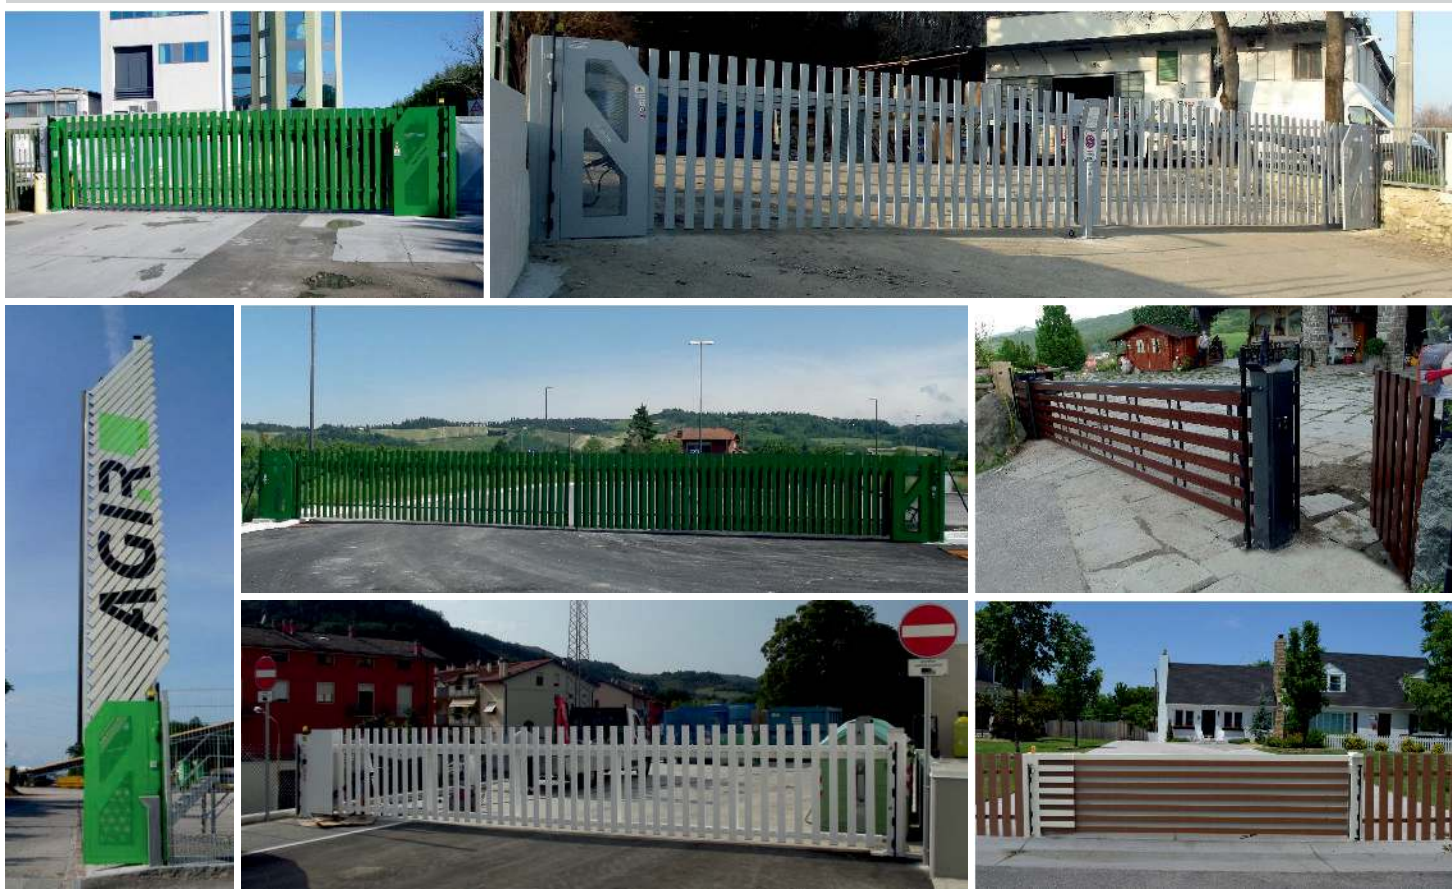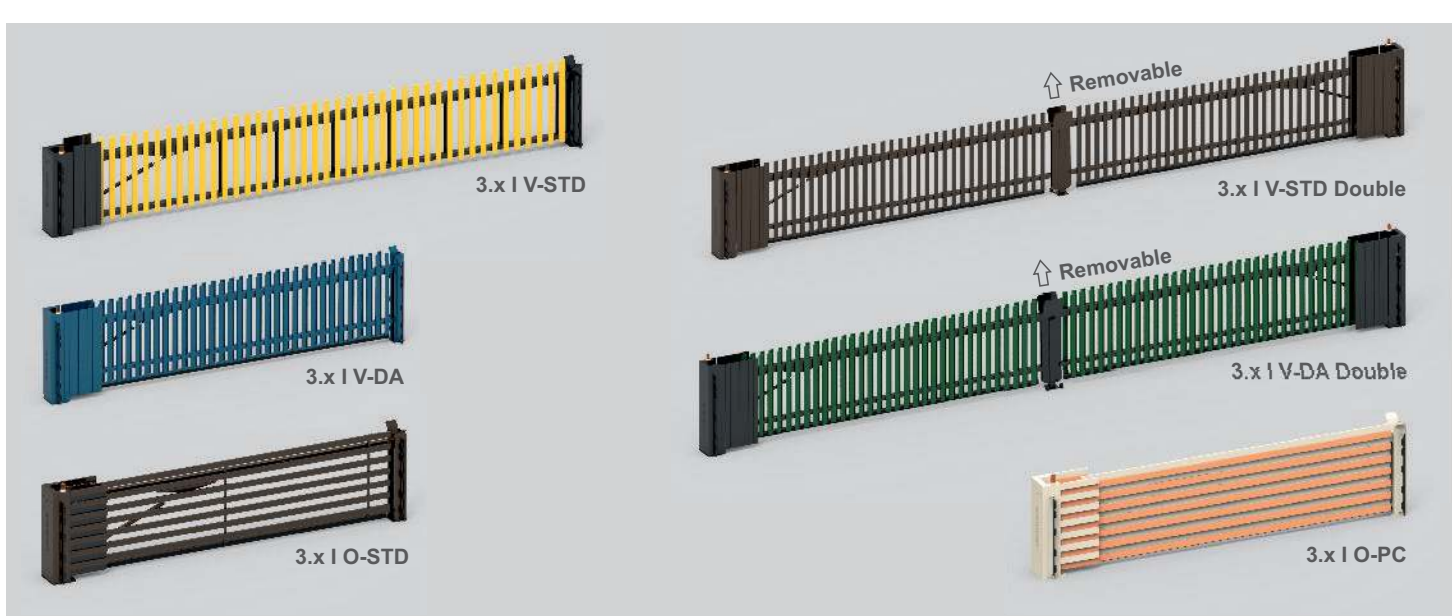

Beauty, Strength and Elegance

TRAFFIC BARRIERS

Model - Modell Modèle - Modello	Length - Länge Longueur - Lunghezza	Type of rods - Stabverarbeitung Type de profil - Tipo di aste	Opening time - Öffnungszeit Temps d'ouverture - Tempo di apertura
HY STD series	2,50 - 7,50 m	Aluminium tubular Ø 100 mm	~ 8 sec.
HY XL series	2,50 - 10,00 m	Central iron tubular 120x60 mm - 2 Aluminium rods 100 mm	~ 12 sec.
HY SN series	3,00 - 8,00 m	Iron tubular 120x60 mm	~ 10 sec.
EM STD series	3,00 - 6,00 m	Aluminium tubular Ø 85 mm	~ 5 sec.
EM PRO series	3,00 - 8,00 m	Aluminium tubular Ø 92 mm	~ 7 sec.

